Yale UX Series





MSL15WUX

The Yale® electric walkie stacker MSL15WUX is designed with productivity and flexibility in mind for the operator. It combines operator friendly controls for easy maneuverability, with added technology features to help users maximise their time.

Productivity

- Maintenance free AC motors
- Multi-function display with BDI and hour meter
- Handle equipped with emergency reversing button
- Auto deceleration function
- · Low speed switch
- Variable speed control
- · Sideways battery removal with rollers
- Mast cushioning for low-noise operation
- Built-in pressure relief valve protects from overloads
- Emergency power disconnect switch
- 240Ah traction battery
- Cold storage configuration (option)

Optimum Structural Design

- · Low centre of gravity enhances stability
- Full free lift mast options for low overhead clearance
- Durable plastic covers
- Adjustable balance caster wheel improves stability

Serviceability

- Low voltage protection setting extends the battery life
- CANbus technology
- Simple electronic components makes troubleshooting and servicing more efficient
- Hall effect sensors reduce wear and increase component life




Tiller Handle (standard) (Left & Right Handed)




Adjustable Straddle legs

Load Charts


Load Center Chart

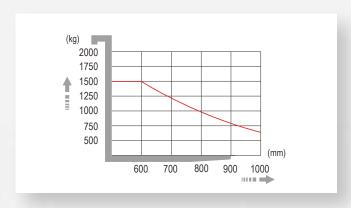


Load Capacity Chart

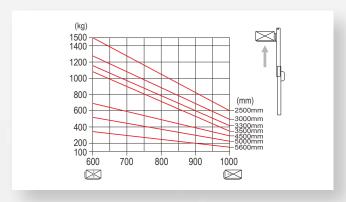



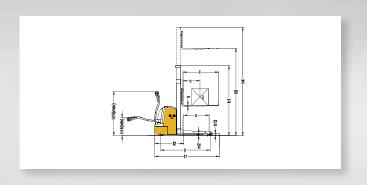

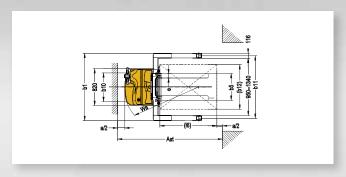

Model	Measurement	MSL15WUX	
Load capacity	Q (kg)	1500	
Load centre distance	c (mm)	600	
Load distance, centre of drive axle to fork	x (mm)	697	
Fork height, lowered	h13 (mm)	70	
Wheelbase	y (mm)	1420	
Axle loading, laden front/rear	kg	1440/1280	
Axle loading, unladen front/rear	kg	870/350	
Tyres		polyurethane	
Tyre size, front	mm	250×70	
Tyre size, rear	mm	80×84	
Additional wheels (dimensions)	mm	150×60	
Wheels, number front rear (x=driven wheels)		1x+1/4	
Tread, front	b10 (mm)	520	
Tread, rear	b11 (mm)	1040-1430	
Mast height lowered	h1 (mm)	1735 1985 2135 2235 2050 2210	2410
Free lift	h2 (mm)	0 0 0 0 1570 1740	194
Max. lift height	h3 (mm)	2500 3000 3300 3500 4500 5000	560
Mast height extended	h4 (mm)	2955 3455 3755 3955 5030 5510	6110
Height of tiller in drive position min./max.	h14 (mm)	670/1300	
Overall length	I1 (mm)	1980	
Length to face of forks	I2 (mm)	915	
Overall width	b1 (mm)	1170-1560	
Fork dimensions	s/e/l (mm)	40/100/1070 (1150)	
Width overall forks	b5 (mm)	200-800	
Ground clearance, centre of wheelbase	m2 (mm)	35	
Aisle width for pallets 1000x1200 crossways	Ast (mm)	2480	
Aisle width for pallets 800x1200 lengthways	Ast (mm)	2465	
Turning radius	Wa (mm)	1610	
Travel speed, laden/unladen	Km/h	5.8/6	
Lift speed, laden/unladen	m/s	0.11/0.15	
Lowering speed, laden/unladen	m/s	0.12/0.12	
Max. gradeability, laden/unladen	%	8/15	
Service brake		Electromagnetic	
Battery voltage, nominal capacity K5	V/Ah	24/240	
Battery weight	kg	240	
Battery dimensions I/w/h	mm	675x254x500	
Sound lever at the driver's ear acc.to DIN12503	dB (A)	65	
Service weight (without battery)	kg	1180/1205/1220/1230/1280/1300/1320	

▶ MSL15WUX Power Plug Type



Yale® Dealers



Contact your local Yale® Dealer

Yale Pacific

1 Bullecourt Avenue, Milperra NSW, Australia 2214 Tel: +61 (2) 9795 3800 | Fax: +61 (2) 9792 8484

Yale Asia

No. 49, Jalan Astaka V8/84A, Bukit Jelutong, 40150 Shan Alam, Selangor, Malaysia Tel: +603 7831 3385

yale.com/pacific/en-au or yale.com/asia/en-sg

Yale and PEOPLE. PRODUCTS. PRODUCTIVITY are trademarks of Hyster-Yale Group, Inc. of is a registered copyright of Hyster-Yale Group, Inc. of Yale Materials Handling Corporation 2019. All rights reserved.

www.yale.com.au









